

PL306



APPLICATION

This is a very versatile product that can be used for numerous applications. This is an excellent putting surface that provides a very realistic roll with natural speed. This is also a great product for use on undulated surfaces and portable applications. This product can be installed indoors or outdoors on concrete.



PROPERTY

DESCRIPTION

Primary/Stalk Yarn Type:	Nylon
Secondary/Thatch Yarn Type:	N/A
Yarn Cross Section:	Texturized Nylon
Standard Color(s)*:	Turf
UV Stabilized:	Yes
Fabric Construction:	Tufted
Primary Backing:	ArmorLoc™ 3L Stabilized Woven PP/PET Multilayer
Coating Type(s):	SilverBack™ Polyurethane or 5mm Polyurethane Foam with Fleece
Perforations:	Not Recommended
Yarn Denier/Ends:	4400/8
Pile Height:	1/4"
Face Weight:	25 oz/yd ²
Fabric Width:	15 ft.

*Custom colors available upon request

200 Howell Dr. Dalton GA 30721

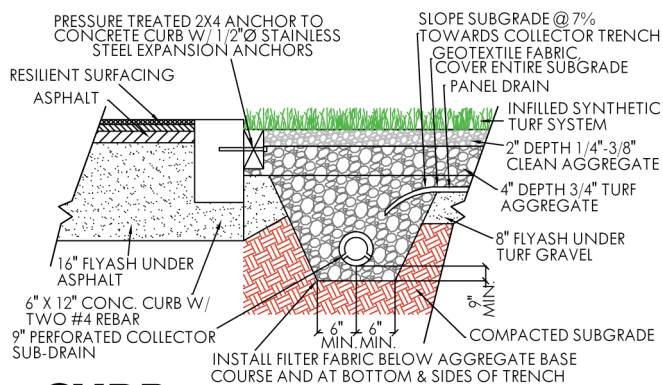
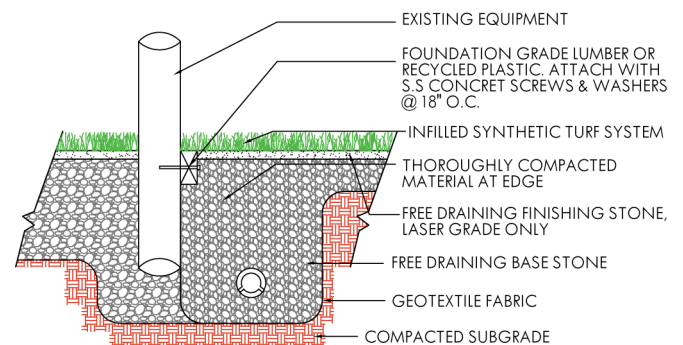
www.cpturf.com

800.564.4492

 **CONTROLLED**
PRODUCTS

PL306

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	.25	In.	6.35	mm.	D-5823
Face Weight	25	oz/yd ²	848	g/m ²	D-5848
Total Fabric Weight	110	oz/yd ²	3,710	g/m ²	D-5848
Primary Backing Weight	7	oz/yd ²	237	g/m ²	D-5848
Secondary Coating Weight	78	oz/yd ²	2,645	g/m ²	D-5848
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Total Yarn Linear Density	4,400	Denier	4,889	D-Tex	D-1577
Tensile Strength	8.0	lbs.	3.63	Kg.	D-5034
Stitch Rate	19.5	Per 3"	49.53	Per 10 cm	D-5793
Machine Gauge	0.1875	In.	0.95	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Fiber Thickness	-	-	100	microns	D-3218


CURB

EQUIPMENT

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.