## PL322



PROPERTY	DESCRIPTION
Primary/Stalk Yarn Type:	Polypropylene
Secondary/Thatch Yarn Type:	N/A
Yarn Cross Section:	Texturized Polypropylene
Standard Color(s):	Pine
UV Stabilized:	Yes
Fabric Construction:	Tufted
Primary Backing:	ArmorLoc <sup>™</sup> 3L Stabilized Woven PP/PET Multilayer
Coating Type(s):	SilverBack™ Polyurethane
Perforations:	Optional
Yarn Denier/Ends:	6500/8
Pile Height:	1"
Face Weight:	120 oz/yd <sup>2</sup>
Fabric Width:	12 and 15 ft.



## APPLICATION

This is a non-infilled high grade polypropylene yarn system designed for heavy traffic tee lines, hitting mats, and extended use golfers. This product is used by many of the top golf courses in the U.S. This product holds a real tee and allows players to hit all clubs, from wedge to driver. This product does not replace real grass, it is an alternative to use to give grass time to heal properly. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



ArmorLoc \*\* 3L






## TESTING

## PL322

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	1	ln.	25	mm.	D-5823
Face Weight	120	oz/yd²	4,068	g/m²	D-5848
Total Fabric Weight	147	oz/yd²	4,984	g/m²	D-5848
Primary Backing Weight	7	oz/yd²	237	g/m²	D-5848
Secondary Coating Weight	22	oz/yd²	746	g/m²	D-5848
Tuft Bind	>10	lbs.	>4.3	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Tensile Strength	8.0	lbs.	3.63	Kg.	D-5034
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Fiber Thickness	_	-	100	microns	D-3218

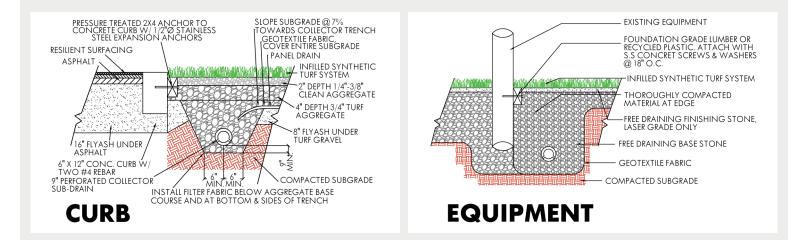

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.