

PL914



APPLICATION

This is the premium bunker turf product. This product looks and feels like a real sand trap. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



| PROPERTY | DESCRIPTION |
|------------------------------------|-------------------------------------------------|
| Primary/Stalk Yarn Type: | Polypropylene |
| Secondary/Thatch Yarn Type: | N/A |
| Yarn Cross Section: | Texturized Polypropylene |
| Standard Color(s)*: | Sand |
| UV Stabilized: | Yes |
| Fabric Construction: | Tufted |
| Primary Backing: | ArmorLoc™ 3L Stabilized Woven PP/PET Multilayer |
| Coating Type(s): | SilverBack™ Polyurethane |
| Perforations: | Optional |
| Yarn Denier/Ends: | 4600/8 |
| Pile Height: | 1" |
| Face Weight: | 36 oz/yd ² |
| Fabric Width: | 15 ft. |

*Custom colors available upon request

200 Howell Dr. Dalton GA 30721

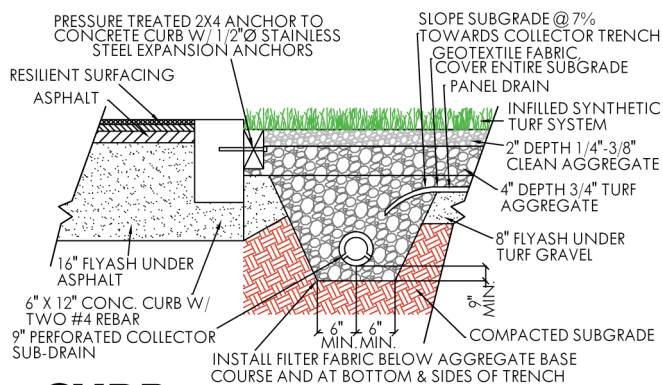
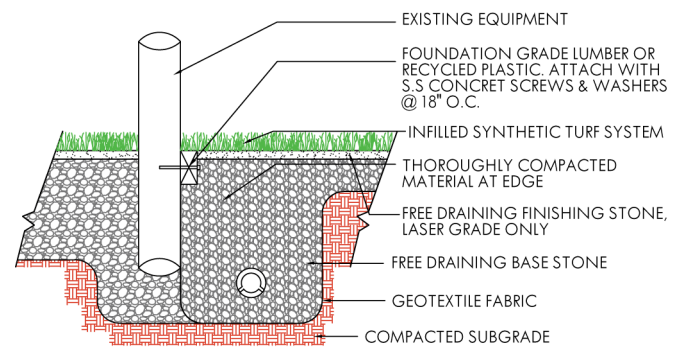
www.cpturf.com

800.564.4492

 **CONTROLLED**
PRODUCTS

PL914

| FINISHED FABRIC | ENGLISH SYSTEM | | METRIC SYSTEM | | ASTM TEST F-1551 |
|--------------------------------------------|----------------|--------------------|---------------|------------------|------------------|
| Nominal Specification | Value | Units | Value | Units | Method |
| Pile Height (Nominal) | 1 | In. | 25.4 | mm. | D-5823 |
| Face Weight | 36 | oz/yd ² | 1221 | g/m ² | D-5848 |
| Total Fabric Weight | 63 | oz/yd ² | 1786 | g/m ² | D-5848 |
| Primary Backing Weight | 7.4 | oz/yd ² | 251 | g/m ² | D-5848 |
| Secondary Coating Weight | 20 | oz/yd ² | 678 | g/m ² | D-5848 |
| Tuft Bind | >8 | lbs. | >3.6 | Kg. | D-1335 |
| Grab Tear Strength (Average) | >200 | lbs. | >91 | Kg. | D-5034 |
| Lead Content | <50 | ppm | <50 | ppm | F-2765 |
| Total Yarn Linear Density | 4,600 | Denier | 5,112 | D-Tex | D-1577 |
| Tensile Strength | 8.0 | lbs. | 3.63 | Kg. | D-5034 |
| Stitch Rate | 19 | Per 3" | 48.26 | Per 10 cm | D-5793 |
| Machine Gauge | 0.375 | In. | .95 | Cm. | D-5793 |
| Flammability | TEST | PASSED | TEST | PASSED | D-2859 |
| Water Permeability with Infill, Perforated | >30 | In./Hr. | >76 | Cm./Hr. | F-1551 |
| Fiber Thickness | - | - | 100 | microns | D-3218 |


CURB

EQUIPMENT

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.