
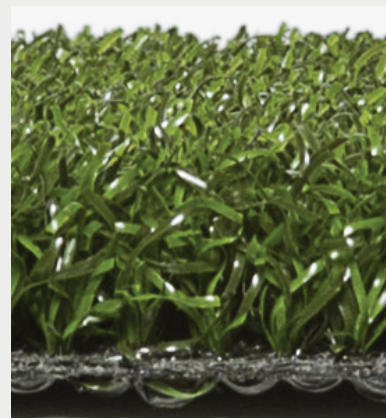


# PL-77

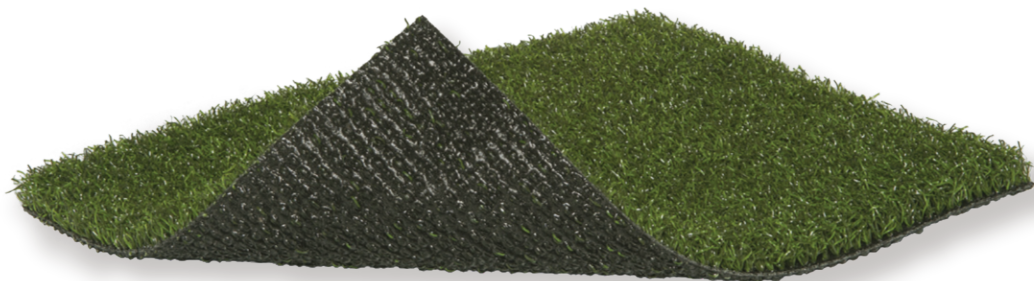

## APPLICATION

The Multicolored yarn used in this product provides an authentic look that is hard to find. This product performs best with sand infill and is designed to hold short chip shots while providing a true roll. This product can be installed outdoors or indoors on a compacted aggregate base or over concrete.

PROPERTY	DESCRIPTION
Primary Yarn Polymer	Polypropylene
Yarn Cross Section	Texturized Polypropylene
Standard Colors	Viridian (12' & 15'); Forest Olive (15')
Coating Type(s)	SilverBack™ Polyurethane
Perforations	No
Pile Height	9/16"
Total Fabric Weight	57 oz/yd <sup>2</sup>
Fabric Width	12 and 15 ft.

Yarn Type



Texturized



\*Custom colors available upon request

200 Howell Dr. Dalton GA 30721

[www.cpturf.com](http://www.cpturf.com)

800.564.4492




CONTROLLED  
PRODUCTS




# PL-77

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
<b>Nominal Specification</b>	Value	Units	Value	Units	<b>Method</b>
Pile Height (Nominal)	.5625	In.	14.29	mm.	D-5823
Face Weight	30	oz/yd <sup>2</sup>	1017	g/m <sup>2</sup>	D-5848
Total Fabric Weight	57	oz/yd <sup>2</sup>	1933	g/m <sup>2</sup>	D-5848
Primary backing Weight	7	oz/yd <sup>2</sup>	237	g/m <sup>2</sup>	D-5848
Secondary Coating Weight	20	oz/yd <sup>2</sup>	678	g/m <sup>2</sup>	D-5848
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Total Yarn Linear Density	4,600	Denier	5,111	D-Tex	D-1577
Tensile Strength	8.0	lbs.	3.63	Kg.	D-5034
Stitch Rate	14	Per 3"	35.56	Per 10 cm	D-5793
Machine Gauge	0.1875	In.	0.95	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/infill	>30	In./Hr.	>76	Cm./Hr.	F-1551
Fiber Thickness	3.9	mils	100	microns	D-3218
Fabric Width	12 & 15	Ft.	3.6 & 4.6	M	None

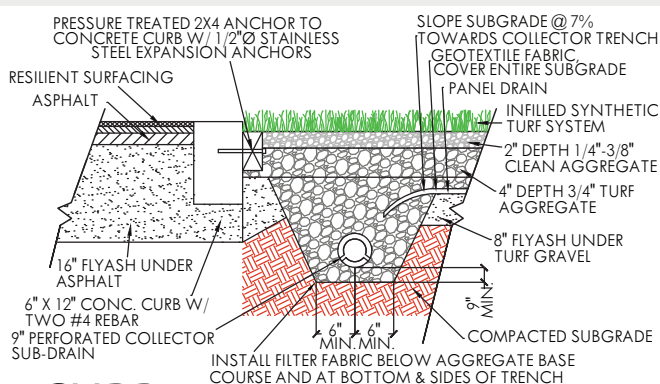

CURB

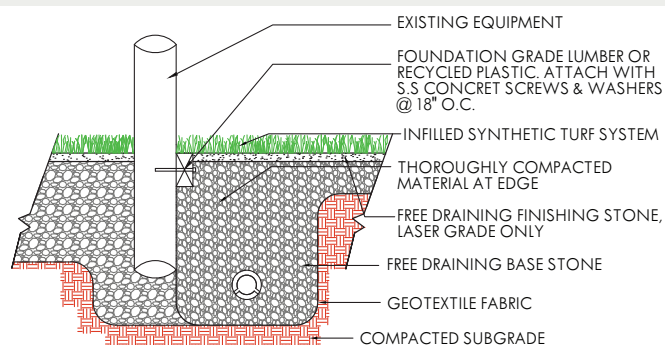

EQUIPMENT