PL306

DDODEDTV





APPLICATION

This is a very versatile product that can be used for numerous applications. This is an excellent putting surface that provides a very realistic roll with natural speed. This is also a great product for use on undulated surfaces and portable applications. This product can be installed indoors or outdoors on concrete.

 \square

PROPERTY	DESCRIPTION			
Primary/Stalk Yarn Type, Shape:	Nylon Texturized Nylon			
Secondary/Thatch Yarn Type, Shape:				
Standard Color*:	Turf Green			
Coating Type:	SilverBack Polyurethane or 5mm Polyurethane Foam with or without fleece			
Perforations:	No			
Pile Height:	1/4"			
Face Weight:	25 oz/yd²			
Total Weight:	107 oz/yd²			
Fabric Width:	15 ft.			
Yarn Type:				
dis.	Texturized			

DESCRIPTION



om 800.564.4492






PRODUCTS

TESTING

PL306

FINISHED FABRIC	ENGLISI	H SYSTEM	METRIC	SYSTEM	ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	.25	ln.	6.35	mm.	D-5823
Face Weight	25	oz/yd²	848	g/m²	D-5848
Total Fabric Weight	107	oz/yd²	3628	g/m²	D-5848
Primary backing Weight	7	oz/yd²	237	g/m²	D-5848
Secondary Coating Weight	75	oz/yd²	2543	g/m²	D-5848
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Total Yarn Linear Density	4,400	Denier	4,889	D-Tex	D-1577
Tensile Strength	8.0	lbs.	3.63	Kg.	D-5034
Stitch Rate	19.5	Per 3″	49.53	Per 10 cm	D-5793
Machine Gauge	0.1875	In.	0.95	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/infill	>30	In./Hr.	>76	Cm./Hr.	F-1551
Fiber Thickness	3.9	mils	100	microns	D-3218
Fabric Width	12	Ft.	3.6	Μ	None

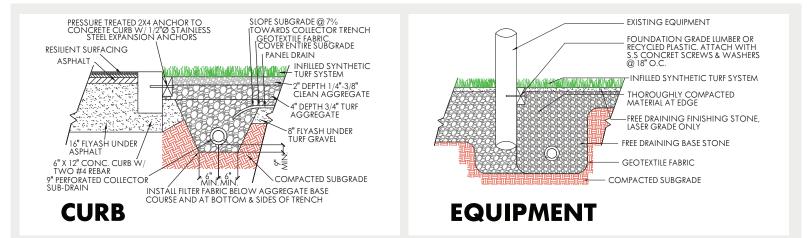

It is the policy of Controlled Products to continuously improve its line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.