PL307



	50
N. C.	
Sector of the sector	and the

APPLICATION

This is a very versatile product that can be used for numerous applications. It is an excellent putting surface that provides a very realistic roll with natural speed. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.

PROPERTY	DESCRIPTION
Primary/Stalk Yarn Type, Shape:	Nylon
Secondary/Thatch Yarn Type, Shape:	Texturized Nylon
Standard Color*:	Turf Green
Coating Type:	Natural Rubber
Perforations:	No
Pile Height:	9/16"
Face Weight:	48 oz/yd²
Total Weight:	83 oz/yd²
Fabric Width:	15 ft.
Yarn Type:	Texturized



PNTROLLE Products



*Custom colors available upon request

200 Howell Dr. Dalton GA 30721

www.cpturf.com

800.564.4492






=

PRODUCTS

TESTING

PL307

FINISHED FABRIC	RIC ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	.5625	ln.	14.29	mm.	D-5823
Face Weight	48	oz/yd²	1627	g/m²	D-5848
Total Fabric Weight	83	oz/yd²	2814	g/m²	D-5848
Primary backing Weight	7	oz/yd²	237	g/m²	D-5848
Secondary Coating Weight	28	oz/yd²	949	g/m²	D-5848
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Total Yarn Linear Density	4,400	Denier	4,889	D-Tex	D-1577
Tensile Strength	8.0	lbs.	3.63	Kg.	D-5034
Stitch Rate	28	Per 3″	71.12	Per 10 cm	D-5793
Machine Gauge	0.1875	ln.	0.48	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/infill	>30	In./Hr.	>76	Cm./Hr.	F-1551
Fiber Thickness	3.9	mils	100	microns	D-3218
Fabric Width	12 =	Ft.	4.6	М	None

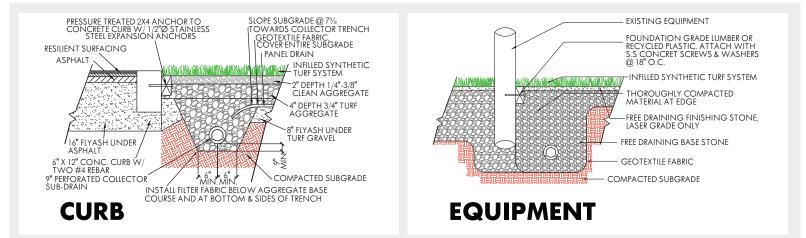

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.