


PL357

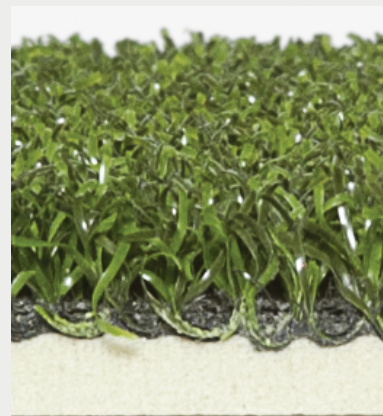

APPLICATION

This is an extremely versatile product that can be used for most applications when a short pile product is needed. Two color availability and multiple backing options provide additional versatility that will help you meet all of your needs. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.

PROPERTY	DESCRIPTION
Primary Yarn Polymer	Polypropylene
Yarn Cross Section	Texturized Polypropylene
Standard Colors	Pine (Foam w/ Fleece) ; Viridian (Foam w/o Fleece)
Coating Type(s)	3mm & 5mm Polyurethane Foam; Silverback
Perforations	No
Pile Height	1/4"
Total Fabric Weight	83 oz/yd ² ; 106 oz/yd ² ; 49 oz/yd ²
Fabric Width	12 ft.; 15 ft.



*Custom colors available upon request

200 Howell Dr. Dalton GA 30721

www.cpturf.com

800.564.4492



CONTROLLED
PRODUCTS



PL357

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	.25	In.	6.35	mm.	D-5823
Face Weight	22	oz/yd ²	746	g/m ²	D-5848
Total Fabric Weight (5mm w/o Fleece)	106	oz/yd ²	3593	g/m ²	D-5848
Total Fabric Weight (5mm w/ Fleece)	103	oz/yd ²	3492	g/m ²	D-5848
Total Fabric Weight (3mm w/o Fleece)	83	oz/yd ²	2814	g/m ²	D-5848
Total Fabric Weight (Silverback)	49	oz/yd ²	1661	g/m ²	D-5848
Primary backing Weight	7.4	oz/yd ²	251	g/m ²	D-5848
Secondary Weight (w/ Fleece)	57	oz/yd ²	1932.3	g/m ²	D-5848
Secondary Weight (w/o Fleece)	54	oz/yd ²	1830.6	g/m ²	D-5848
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Total Yarn Linear Density	4,600	Denier	5,112	D-Tex	D-1577
Tensile Strength	8.0	lbs.	3.63	Kg.	D-5034
Stitch Rate	18	Per 3"	45.72	Per 10 cm	D-5793
Machine Gauge	0.1875	In.	0.48	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/infill	>30	In./Hr.	>76	Cm./Hr.	F-1551
Fiber Thickness	3.9	mils	100	microns	D-3218
Fabric Width	12 & 15	Ft.	3.6 & 4.6	M	None

