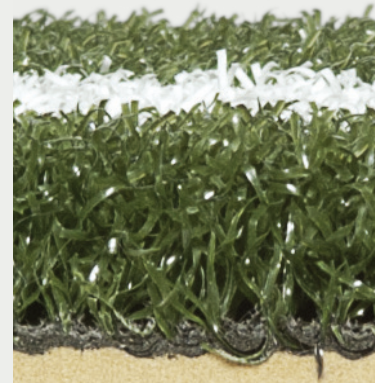


PL710



APPLICATION

Baseball mats are offered with the home plates built in to the mat or without a home plate. They come complete as the picture shows, when ordered with an inlaid home plate. Foam provides added softness, comfort, and stability. These are the most authentic and durable turf batter's boxes in the industry. Not designed for metal cleats.



ArmorLoc™ 3L



PROPERTY

DESCRIPTION

Primary/Stalk Yarn Type:	Polypropylene
Secondary/Thatch Yarn Type:	N/A
Yarn Cross Section:	Texturized Polypropylene
Standard Color(s)*:	Pine, Terra Cotta
UV Stabilized:	Yes
Fabric Construction:	Tufted
Primary Backing:	ArmorLoc™ 3L Stabilized Woven PP/PET Multilayer
Coating Type(s):	5mm Polyurethane Foam
Perforations:	Not Recommended
Yarn Denier/Ends:	4600/8
Pile Height:	9/16"
Face Weight:	36 oz/yd ²
Fabric Width:	15 ft.

*Custom colors available upon request

200 Howell Dr. Dalton GA 30721

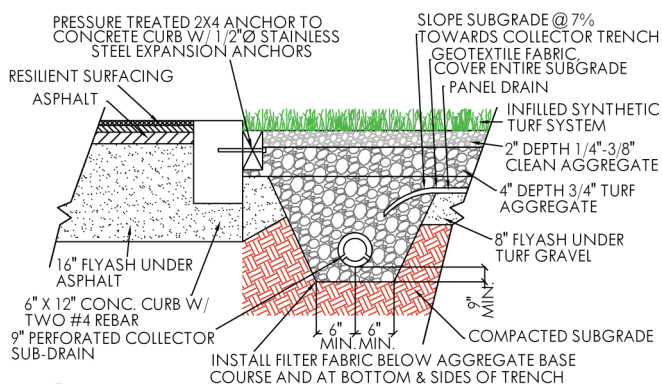
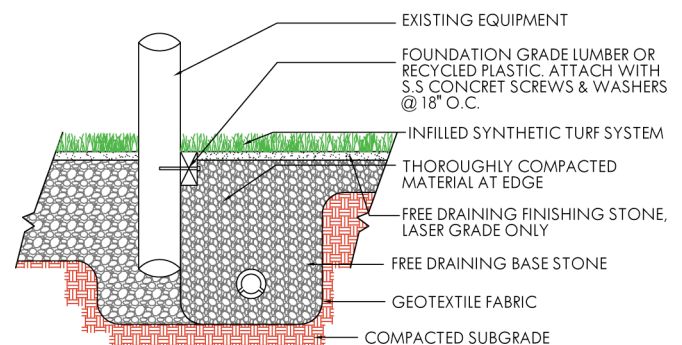
www.cpturf.com

800.564.4492

CONTROLLED
PRODUCTS

PL710

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	.5625	In.	14.29	mm.	D-5823
Face Weight	36	oz/yd ²	1,221	g/m ²	D-5848
Total Fabric Weight	121	oz/yd ²	4,103	g/m ²	D-5848
Primary Backing Weight	7	oz/yd ²	237	g/m ²	D-5848
Secondary Coating Weight	78	oz/yd ²	2,645	g/m ²	D-5848
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Total Yarn Linear Density	4,600	Denier	5,111	D-Tex	D-1577
Tensile Strength	8.0	lbs.	3.63	Kg.	D-5034
Machine Gauge	0.1875	In.	0.48	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Fiber Thickness	-	-	100	microns	D-3218


CURB

EQUIPMENT

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.