

WAVE



APPLICATION

Elevate your outdoor space with Wave, a versatile landscaping solution. Featuring soft polyethylene stalk fibers in field and olive hues, complemented by olive and tan thatch colors, Wave replicates the variegated appearance of real grass. Say goodbye to artificial-looking lawns and hello to a vibrant, lifelike landscape. Built to withstand the elements, Wave is engineered for long-lasting performance, durability, and minimal maintenance.

PROPERTY

DESCRIPTION

Primary/Stalk Yarn Type:	Polyethylene
Secondary/Thatch Yarn Type:	Polypropylene
Yarn Cross Section:	Polyethylene Wave Monofilament with Texturized Polypropylene Thatch
Standard Color(s)*:	Field/Olive with Olive/Tan Thatch
UV Stabilized:	Yes
Fabric Construction:	Tufted
Coating Type(s):	Polyurethane
Perforations:	Yes
Yarn Denier/Ends:	Stalk: 11400/6 Thatch: 3600/8
Pile Height:	1-1/2"
Face Weight:	50 oz/yd ²
Fabric Width:	15 ft.



*Custom colors available upon request

200 Howell Dr. Dalton GA 30721


www.cpturf.com

800.564.4492


 **CONTROLLED**
PRODUCTS

WAVE

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	1.5	In.	38	mm.	D-5823
Face Weight	50	oz/yd ²	1,695	g/m ²	D-5848
Total Fabric Weight	77	oz/yd ²	2,611	g/m ²	D-5848
Primary Backing Weight	7	oz/yd ²	237	g/m ²	D-5848
Secondary Coating Weight	20	oz/yd ²	678	g/m ²	D-5848
Tuft Bind	>10	lbs.	>4.5	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2765
Total Yarn Linear Density	15,000	Denier	16,667	D-Tex	D-1577
Tensile Strength	>8	lbs.	>3.6	Kg.	D-5034
Machine Gauge	0.375	In.	0.95	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability with Infill, Perforated	>30	In./Hr.	>76	Cm./Hr.	F-1551
Fiber Thickness	-	-	310	microns	D-3218

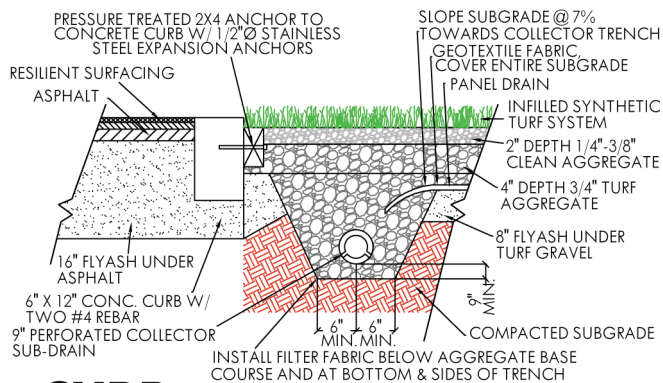

CURB

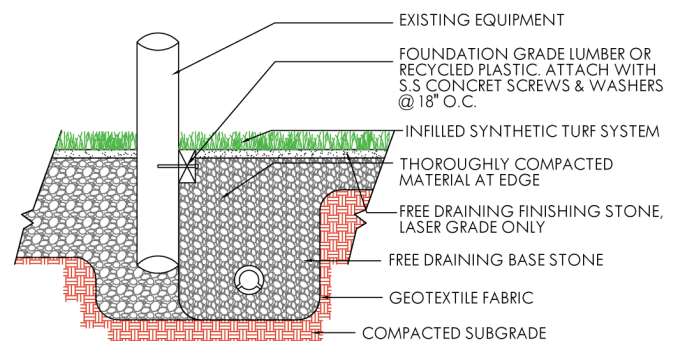

EQUIPMENT

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.